


**HRT**  
High Resolution Technologies



**LineStreamer +**  
High Performance external USB sound card

The **LineStreamer +** is a high performance external sound card that connects between a computer and any line level analog source. USB connected and powered, the LineStreamer + is simple to use and allows anyone to digitize any analog source at a level of quality previously available only to the elite professional.

With its high performance asynchronous USB transceiver and ultra high performance 24 bit analog to digital converter, the LineStreamer + is a complete single box solution. All power requirements for the LineStreamer + are supplied from the USB cable, operation is simple, just plug into any available USB port and in a matter of seconds, you will be ready to start recording.

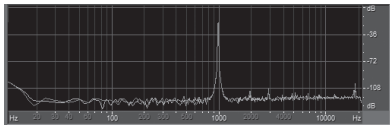

*ultra low noise  
& distortion*

With its jitter free interface, the LineStreamer + will transform your computer into a professional quality digital audio recorder. Utilizing native Audio Class 1.0 drivers (present in all modern PC, Mac & Linux computers) there are no drivers nor software to install. Simply connect it to your computer via a USB cable, select the LineStreamer + and you are ready to go.

LED indicators show the current sample rate (32k, 44k1, 48k, 88k2 & 96k) as well as the state of the mute circuit. On the input end of the LineStreamer + a pair of peak indicators are provided so you can monitor the recording level to obtain perfect results. High Resolution Technologies' UpStream utility allows the LineStreamer + firmware to be updated right from the computer's desktop in a matter of seconds.

High Resolution Technologies LineStreamer +, designed and manufactured in Southern California.

# Everyone deserves great sound!

High Resolution Technologies is proud to offer the LineStreamer +, the product for tomorrow, available today.

web: [www.hirestech.com](http://www.hirestech.com) • e-mail: [sales@hirestech.com](mailto:sales@hirestech.com) • telephone: +323-967-7447 • fax: +714-985-0155

## Specification

## LineStreamer +

### Electrical

Full Scale Sensitivity	2.25 Volts RMS
Input Impedance	5k Ohm
Frequency Response (20 Hz / 20 kHz)	+0 / -4 dB
S/N Ratio (DC to 30 kHz)	104 dB
S/N Ratio (A-weighted)	109 dB
THD+N (1 kHz Full Scale)	.003%
THD+N (1kHz -20 dB)	.001%
Jitter contribution (DC to 30 kHz)	> 130 dB below full scale
Indicators	peak, sample rate & mute

### Interface

Sample Rate	up to 96 kHz
Bit Depth	24 bit
USB transfer protocol	asynchronous
Power Requirements ( <i>bus powered</i> )	450 mA
Dimensions	2.9" x 2.4" x 5.8"